


# Datasheet: N61100 Series

N61100 Series Multi-channel High Performance DC Electronic Load

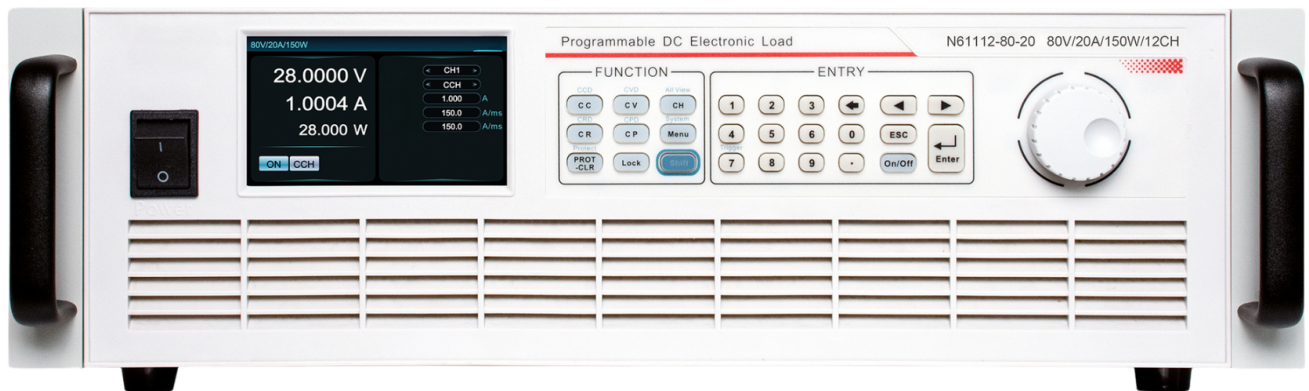

Version: 04.03.2025

Official partner of NGI: Service and sales directly through ET System electronic GmbH.


## THE WORLD OF POWER

Your Partner for: DC & AC power supplies, bidirectional AC / DC solutions, conventional & regenerative loads, and battery cell simulators.




## Multiple operation modes

N61100 series not only supports four basic modes of CC, CV, CP, and CR, but also supports four combined working modes of CV+CC, CR+CC, CV+CR, CP+CC. CR+CC mode is suitable for power-on test of source, preventing over current protection during power-on. CV+CR mode can replace Von function. CV+CC mode can simulate the working mode conversion process of battery charging. Users can select different operation modes according to their test application.

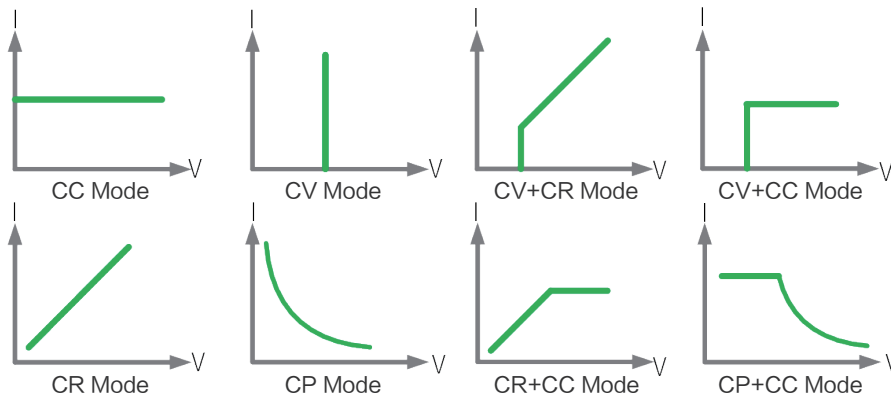

## LED light simulation to test LED driving power



The electronic load has LED light simulation function. As shown in the figure, the LED equivalent circuit is to connect the resistance  $R_d$  with the voltage source  $V_f$  in series. Its I-V curve is equivalent to tangent of the real LED nonlinear I-V curve at the operating point ( $V_0, I_0$ ).

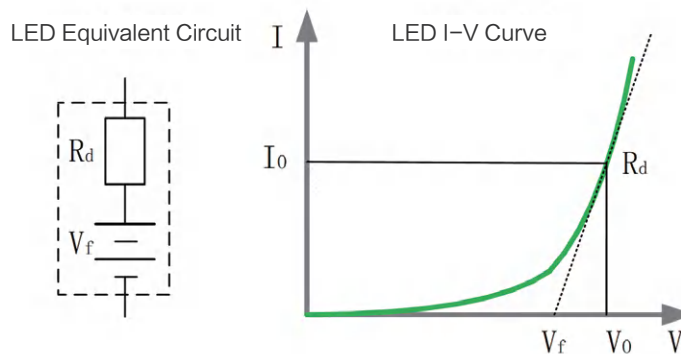





Under LED mode, users need to set three parameters to simulate real LED light loading condition, including the rated output current of LED driving power, LED operating voltage, and resistance coefficient.

## OCP (over current protection) test

During OCP test, N61100 will load under CC mode and check whether the DUT voltage is lower than end voltage. If lower, N61100 will record the present loading current as the test result and shut the input to stop the test. If the DUT voltage is higher than end voltage, N61100 will increase the loading current until the DUT voltage is lower than end voltage or it reaches the Max. loading current.

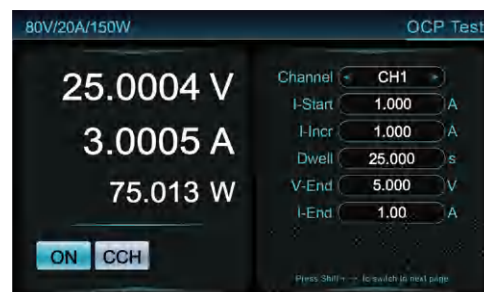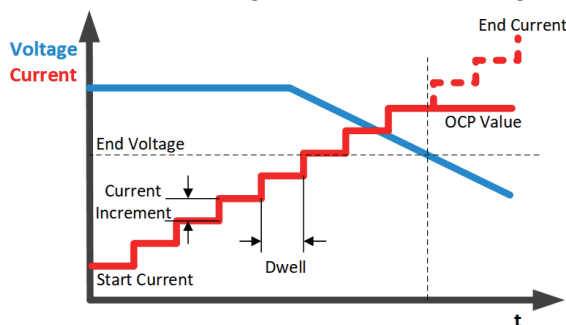

## Product Dimension

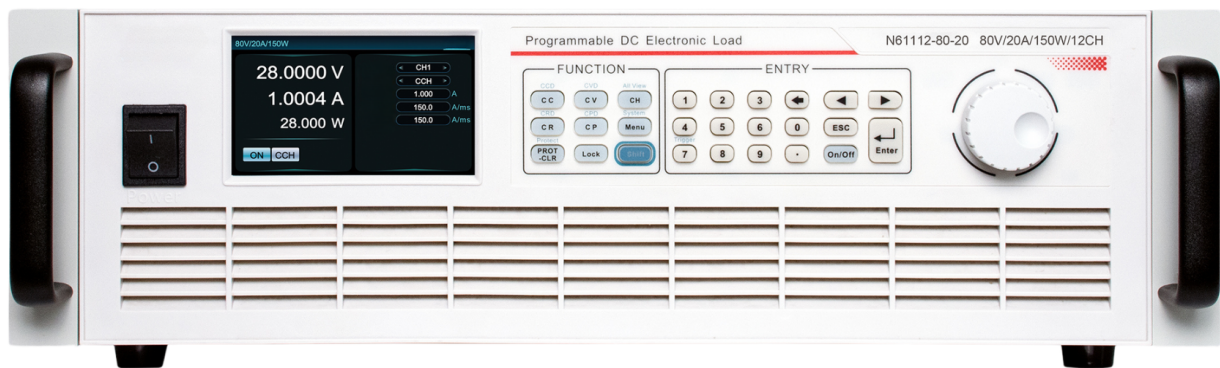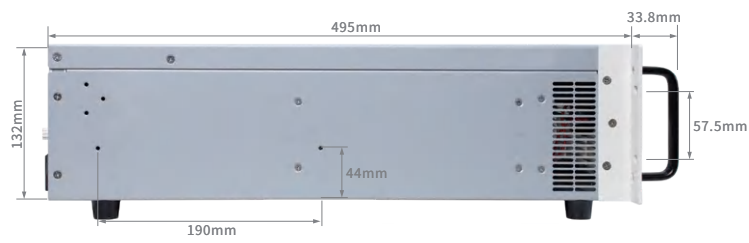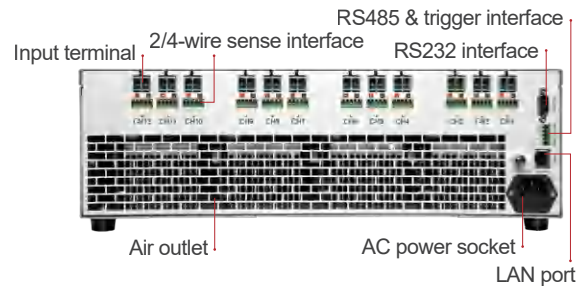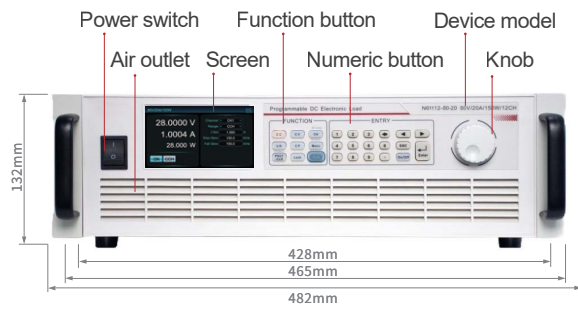

## Technical Data Sheet (1)

Model	N61112-80-20		N61112-150-20		N61112-600-05	
Voltage	80V		150V		600V	
Current	20A		20A		5A	
Power	150W					
Min. Operating Voltage	0.5V@2A	1V@20A	0.5V@2A	1V@20A	0.6V@0.5A	1.5V@5A
Channels	12CH					
CV Mode						
Range	0~8V	0~80V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.025%+0.025%F.S.					
Readback Resolution	10μV	0.1mV	0.1mV	1mV	0.1mV	1mV
Readback Accuracy (23±5°C)	0.025%+0.025%F.S.					
CC Mode						
Range	0~2A	0~20A	0~2A	0~20A	0~500mA	0~5A
Setting Resolution	0.1mA	1mA	0.1mA	1mA	10μA	0.1mA
Setting Accuracy (23±5°C)	0.05%+0.05%F.S.					
Readback Resolution	10μA	0.1mA	10μA	0.1mA	1μA	10μA
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
CP Mode						
Range	15W	150W	15W	150W	15W	150W
Setting Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Setting Accuracy (23±5°C)	0.1%+0.1%F.S.					
Readback Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Readback Accuracy (23±5°C)	0.1%+0.1%F.S.					
CR Mode						
Range	0.5Ω~16000Ω	0.25Ω~1600Ω	0.5Ω~30000Ω	0.25Ω~3000Ω	0.3Ω~99000Ω	1.2Ω~9900Ω
Setting Resolution	0.1Ω	0.01Ω	0.1Ω	0.01Ω	0.1Ω	0.01Ω
Setting Accuracy (23±5°C)	(Vin/Rset)*0.1%+0.1%F.S.					
Slew Rate						
Current	0.1~130A/ms	0.1~1600A/ms	0.1~130A/ms	0.1~1600A/ms	0.1~45A/ms	0.1~600A/ms
Power	0.1~130A/ms	0.1~1600A/ms	0.1~130A/ms	0.1~1600A/ms	0.1~45A/ms	0.1~600A/ms
Resistance	0.1~130A/ms	0.1~1600A/ms	0.1~130A/ms	0.1~1600A/ms	0.1~45A/ms	0.1~600A/ms
Dynamic Mode (CCD)						
T1&T2	0.016ms~60000ms/0.016s~60000s					
Resolution	1μs/1ms					
Rise/Fall Slew Rate	0.1~130A/ms	0.1~1600A/ms	0.1~130A/ms	0.1~1600A/ms	0.1~45A/ms	0.1~600A/ms
Others						
Protection	OVP/OCP/OPP/OTP/RV					
Interface	LAN/RS232/RS485					
Communication Protocol	Modbus-RTU protocol, SCPI protocol					
Communication Response Time	≤5ms					
AC Input	Single phase, 100~240V AC, frequency 47Hz~63Hz, current≤1A@220V, current≤2A@110V					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx. 18kg					
Dimension	3U, 132.0(H)*482.0(W)with handle*495.0(D)mm					

Note 1: For other specifications, please contact us.

Note 2: All specifications are subject to change without notice.

## Technical Data Sheet (2)

Model	N61106-80-40		N61106-150-40		N61106-600-10	
Voltage	80V		150V		600V	
Current	40A		40A		10A	
Power	300W					
Min. Operating Voltage	0.5V@4A	1V@40A	0.5V@4A	1V@40A	0.6V@1A	1.5V@10A
Channels	6CH					
CV Mode						
Range	0~8V	0~80V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.025%+0.025%F.S.					
Readback Resolution	10μV	0.1mV	0.1mV	1mV	0.1mV	1mV
Readback Accuracy (23±5°C)	0.025%+0.025%F.S.					
CC Mode						
Range	0~4A	0~40A	0~4A	0~40A	0~1A	0~10A
Setting Resolution	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA
Setting Accuracy (23±5°C)	0.05%+0.05%F.S.					
Readback Resolution	10μA	0.1mA	10μA	0.1mA	10μA	0.1mA
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
CP Mode						
Range	30W	300W	30W	300W	30W	300W
Setting Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Setting Accuracy (23±5°C)	0.1%+0.1%F.S.					
Readback Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Readback Accuracy (23±5°C)	0.1%+0.1%F.S.					
CR Mode						
Range	0.5Ω~8000Ω	0.25Ω~800Ω	0.5Ω~1500Ω	0.25Ω~1500Ω	0.3Ω~49500Ω	1.2Ω~4950Ω
Setting Resolution	0.1Ω	0.01Ω	0.1Ω	0.01Ω	0.1Ω	0.01Ω
Setting Accuracy (23±5°C)	(Vin/Rset)*0.1%+0.1%F.S.					
Slew Rate						
Current	0.1~260A/ms	0.1~3200A/ms	0.1~260A/ms	0.1~3200A/ms	0.1~90A/ms	0.1~1200A/ms
Power	0.1~260A/ms	0.1~3200A/ms	0.1~260A/ms	0.1~3200A/ms	0.1~90A/ms	0.1~1200A/ms
Resistance	0.1~260A/ms	0.1~3200A/ms	0.1~260A/ms	0.1~3200A/ms	0.1~90A/ms	0.1~1200A/ms
Dynamic Mode (CCD)						
T1&T2	0.016ms~60000ms/0.016s~60000s					
Resolution	1μs/1ms					
Rise/Fall Slew Rate	0.1~260A/ms	0.1~3200A/ms	0.1~260A/ms	0.1~3200A/ms	0.1~90A/ms	0.1~1200A/ms
Others						
Protection	OVP/OCP/OPP/OTP/RV					
Interface	LAN/RS232/RS485					
Communication Protocol	Modbus-RTU protocol, SCPI protocol					
Communication Response Time	≤5ms					
AC Input	Single phase, 100~240V AC, frequency 47Hz~63Hz, current≤1A@220V, current≤2A@110V					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx. 18kg					
Dimension	3U, 132.0(H)*482.0(W)with handle*495.0(D)mm					

Note 1: For other specifications, please contact us.

Note 2: All specifications are subject to change without notice.

### Technical Data Sheet (3)

Model	N61104-80-60		N61104-150-60		N61104-600-15	
Voltage	80V		150V		600V	
Current	60A		60A		15A	
Power	540W					
Min. Operating Voltage	0.5V@6A	1V@60A	0.5V@6A	1V@60A	0.6V@1.5A	1.5V@15A
Channels	4CH					
CV Mode						
Range	0~8V	0~80V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.025%+0.025%F.S.					
Readback Resolution	10μV	0.1mV	0.1mV	1mV	0.1mV	1mV
Readback Accuracy (23±5°C)	0.025%+0.025%F.S.					
CC Mode						
Range	0~6A	0~60A	0~6A	0~60A	0~1.5A	0~15A
Setting Resolution	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA
Setting Accuracy (23±5°C)	0.05%+0.05%F.S.					
Readback Resolution	10μA	0.1mA	10μA	0.1mA	10μA	0.1mA
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
CP Mode						
Range	54W	540W	54W	540W	54W	540W
Setting Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Setting Accuracy (23±5°C)	0.1%+0.1%F.S.					
Readback Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Readback Accuracy (23±5°C)	0.1%+0.1%F.S.					
CR Mode						
Range	0.5Ω~5333Ω	0.25Ω~533Ω	0.5Ω~10000Ω	0.25Ω~1000Ω	0.3Ω~33000Ω	1.2Ω~3300Ω
Setting Resolution	0.1Ω	0.01Ω	0.1Ω	0.01Ω	0.1Ω	0.01Ω
Setting Accuracy (23±5°C)	(Vin/Rset)*0.1%+0.1%F.S.					
Slew Rate						
Current	0.1~390A/ms	0.1~4800A/ms	0.1~390A/ms	0.1~4800A/ms	0.1~135A/ms	0.1~1800A/ms
Power	0.1~390A/ms	0.1~4800A/ms	0.1~390A/ms	0.1~4800A/ms	0.1~135A/ms	0.1~1800A/ms
Resistance	0.1~390A/ms	0.1~4800A/ms	0.1~390A/ms	0.1~4800A/ms	0.1~135A/ms	0.1~1800A/ms
Dynamic Mode (CCD)						
T1&T2	0.016ms~60000ms/0.016s~60000s					
Resolution	1μs/1ms					
Rise/Fall Slew Rate	0.1~390A/ms	0.1~4800A/ms	0.1~390A/ms	0.1~4800A/ms	0.1~135A/ms	0.1~1800A/ms
Others						
Protection	OVP/OCP/OPP/OTP/RV					
Interface	LAN/RS232/RS485					
Communication Protocol	Modbus-RTU protocol, SCPI protocol					
Communication Response Time	≤5ms					
AC Input	Single phase, 100~240V AC, frequency 47Hz~63Hz, current≤1A@220V, current≤2A@110V					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx. 18kg					
Dimension	3U, 132.0(H)*482.0(W)with handle*495.0(D)mm					

Note 1: For other specifications, please contact us.

Note 2: All specifications are subject to change without notice.

## Technical Data Sheet (4)

Model	N61102-80-120		N61102-150-120		N61102-600-30	
Voltage	80V		150V		600V	
Current	120A		120A		30A	
Power	900W					
Min. Operating Voltage	0.5V@12A	1V@120A	0.5V@12A	1V@120A	0.6V@3A	1.5V@30A
Channels	2CH					
CV Mode						
Range	0~8V	0~80V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.025%+0.025%F.S.					
Readback Resolution	10μV	0.1mV	0.1mV	1mV	0.1mV	1mV
Readback Accuracy (23±5°C)	0.025%+0.025%F.S.					
CC Mode						
Range	0~12A	0~120A	0~12A	0~120A	0~3A	0~30A
Setting Resolution	1mA	10mA	1mA	10mA	0.1mA	1mA
Setting Accuracy (23±5°C)	0.05%+0.05%F.S.					
Readback Resolution	0.1mA	1mA	0.1mA	1mA	10μA	0.1mA
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
CP Mode						
Range	90W	900W	90W	900W	90W	900W
Setting Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Setting Accuracy (23±5°C)	0.1%+0.1%F.S.					
Readback Resolution	1mW	10mW	1mW	10mW	1mW	10mW
Readback Accuracy (23±5°C)	0.1%+0.1%F.S.					
CR Mode						
Range	0.5Ω~2666Ω	0.25Ω~266Ω	0.5Ω~5000Ω	0.25Ω~500Ω	0.3Ω~16500Ω	1.2Ω~1650Ω
Setting Resolution	0.1Ω	0.01Ω	0.1Ω	0.01Ω	0.1Ω	0.01Ω
Setting Accuracy (23±5°C)	(Vin/Rset)*0.1%+0.1%F.S.					
Slew Rate						
Current	0.1~780A/ms	0.1~9600A/ms	0.1~780A/ms	0.1~9600A/ms	0.1~270A/ms	0.1~3600A/ms
Power	0.1~780A/ms	0.1~9600A/ms	0.1~780A/ms	0.1~9600A/ms	0.1~270A/ms	0.1~3600A/ms
Resistance	0.1~780A/ms	0.1~9600A/ms	0.1~780A/ms	0.1~9600A/ms	0.1~270A/ms	0.1~3600A/ms
Dynamic Mode (CCD)						
T1&T2	0.016ms~60000ms/0.016s~60000s					
Resolution	1μs/1ms					
Rise/Fall Slew Rate	0.1~780A/ms	0.1~9600A/ms	0.1~780A/ms	0.1~9600A/ms	0.1~270A/ms	0.1~3600A/ms
Others						
Protection	OVP/OCP/OPP/OTP/RV					
Interface	LAN/RS232/RS485					
Communication Protocol	Modbus-RTU protocol, SCPI protocol					
Communication Response Time	≤5ms					
AC Input	Single phase, 100~240V AC, frequency 47Hz~63Hz, current≤1A@220V, current≤2A@110V					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx.18kg					
Dimension	3U, 132.0(H)*482.0(W)with handle*495.0(D)mm					

Note 1: For other specifications, please contact us.

Note 2: All specifications are subject to change without notice.